

BRU – Runway works Summer 2025

During the Summer of 2025, Brussels Airport will execute a complete renovation of runway 25L/07R. The works will take place in July and August.

These operations are part of a general maintenance and renovation program to maintain the safe and efficient operation of the runways. The previous renovation works on this scale on this runway date back to 2015.

The following works will be carried out:

- The pavement of RWY 25L (including Turnpad 25L) will be renovated to the first underlayer.
- The runway lighting system, including all lights, primary cables next to the runway and secondary cables located in the first underlayer will be replaced.
- The runway drainage system and associated collectors will fully reconstructed.

Brussels Airport is planning the operations in various phases with the intent of minimizing the overall impact on airport capacity. In the figure below, detail is given on the different phases and the timing.

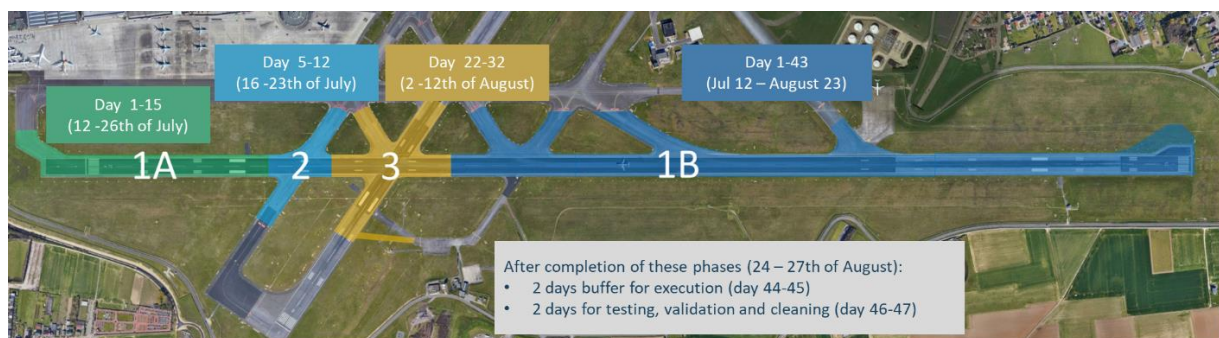


Figure 1: Detail of phases and timing of RWY 25L renovation works

The only period when capacity will be restricted is during phase 3 from **August 2-12th**. During the other phases, the works may result in **occasional ATFM delays**. For further information, please contact Belgium Slot Coordination:

Belgium Slot Coordination
Tel: +32 2 753 57 91
Email: bruacxh@brucoord.org
www.brucoord.org

Due to the limited number of available slots during phase 3 of the works, all airlines are urgently requested to return slots that will not be used as soon as possible.